The Egyptian Carbonate Co. for Mining (S.A.E.)

TECHNICAL DATA SHEET — ECC SF 70

DESCRIPTION & APPLICATIONS

ECC SF 70 is a fine particle size, high brightness calcium carbonated derived from pure limestone. It is characterized by its high whiteness. **ECC SF 70** is used in paper, Powder coating (glossy finish), water based paints, solvent based paints, protective paints, printing inks, adhesives and sealants.

CHEMICAL COMPOSITION AND PHYSICAL PROPERTIES

CHEMICAL COMPOSITION	
Content CaCO3	99 % MIN
Content MgCO3	0.20 % MAX
Content Fe2O3	0.01 % MAX
Content AL2O3	0.04 % MAX
Content SiO2	0.01 % MAX
Content Na2O	0.05 % MAX
Content CaO	56.06% MAX
L.O.I	43.89 % MAX

PHYSICAL PROPERTIES		
Whiteness	97.5% MIN	(DIN 6174)
Refractive Index	1.59 %	
Humidity	0.2 % MAX	
Hardness (Mohs)	3.00	
Density of $CaCO_3$	2.730 g/cm^3	
P^H	9	(ISO 787/9)
Oil Absorption	26.0 ml/100g	(ISO 787/5)
Bulk Density	0.5 g/ml	(ISO 787/11)

FINENESS

Particle Size Distribution by SEDIGRAPH 5120:

PARTICLES < 2 µM	MAIN PARTICLE SIZE (D50)	TOP CUT (D98)
70 ± 1 µm	1.4 µm MAX	4.5 ± 0.50 µm

CUMULATIVE FINER MASS PERCENT vs. DIAMETER

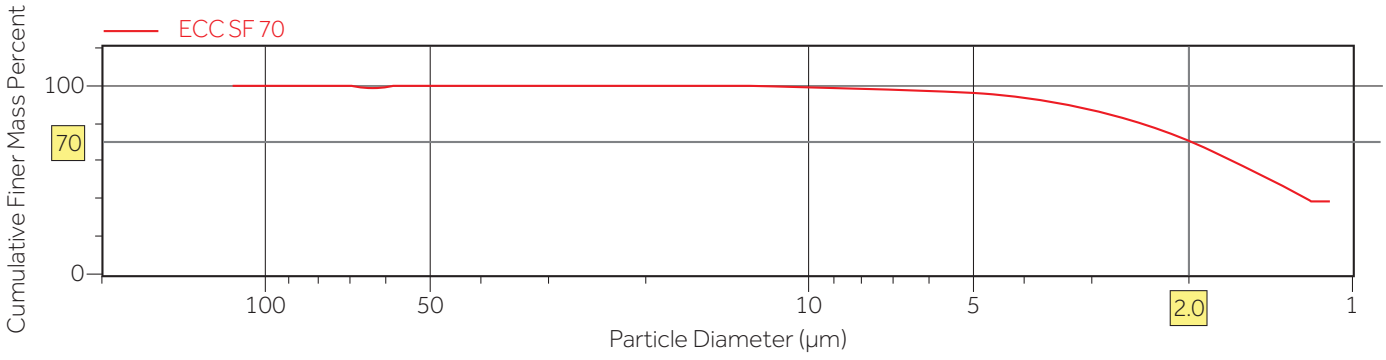

Cairo Plant: Kafr El-Ulwi, EL-Tebbin, Helwan, Cairo, Egypt.
Alexandria Plant: Industrial Zone, Fourth Extension, Borg El Arab, Alexandria, Egypt.
Phone: +20 128 394 3739 **Fax:** +202 25 444 700
Emails: inquires@egyptian-carbonate.com
sales@ egyptian-carbonate.com
Website: www.egyptian-carbonate.com